
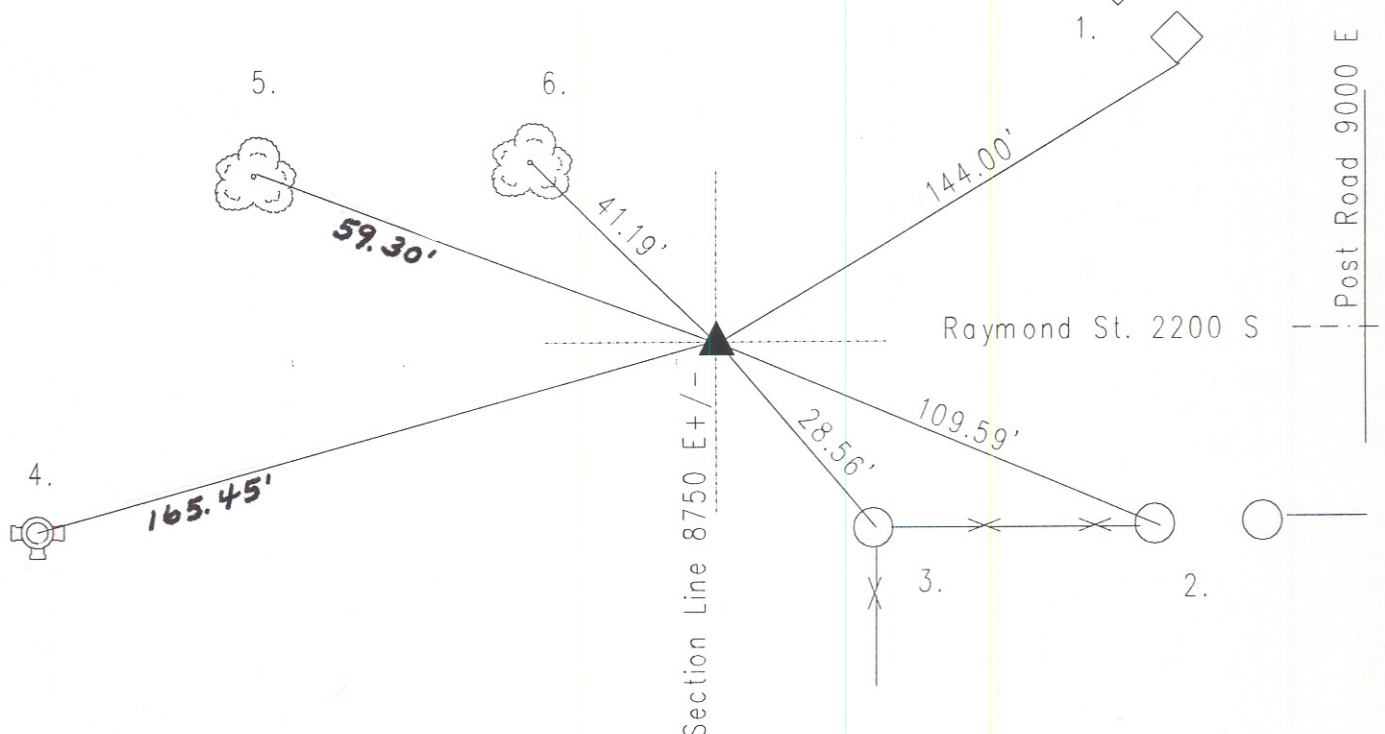


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 19 TOWNSHIP 15 RANGE 5
DATE: 6-26-02 8-1-07
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Railroad spike set Fd.
METHOD OF ESTABLISHMENT: County: 11-19-97

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

NOTE: Set railroad spike over stone found 17" down with steel guard by it.

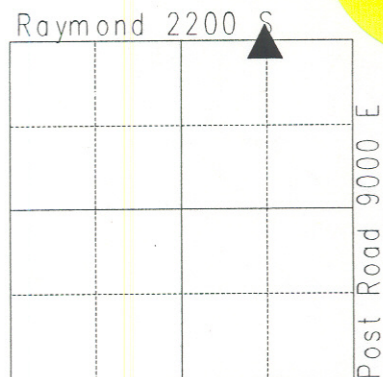

SX551911

REF.	DISTANCE	DESCRIPTION
1.	144.00'	Cut 'x' S-leg of high tension tower 36"up
2.	109.59'	Top center of gate post For ADDRESS 8723
3.	28.56'	Top center of gate post For ADDRESS 8723
4.	165.45'	Top nut of fire hydrant
5.	59.30'	Railroad spike NE twin oak 6"up
6.	41.19'	Railroad spike SE twin oak 48"up